SPECIFIC PURPOSE SURVEY; LOCATE 12' CONTOUR LINE
OKALOOSA AND WALTON COUNTIES
FOR
WALTON COUNTY, FLORIDA

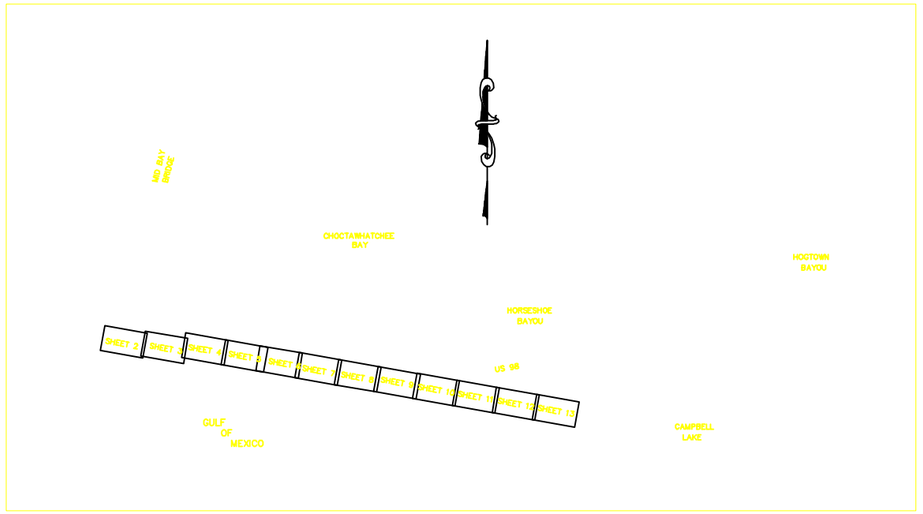

LOCATION MAP
1" = 5,000 FEET

NOTES

1. GRID COORDINATES SHOWN ARE IN FEET, AND ARE REFERENCED TO THE FLORIDA STATE PLANE COORDINATE SYSTEM, NORTH ZONE, NORTH AMERICAN DATUM OF 1983, NGS ADJUSTMENT OF 1990 (NAD 83/90).
2. GRID COORDINATES ARE BASED ON CONTROL MONUMENTS AS SHOWN IN THE CONTROL TABLE.
3. ELEVATIONS SHOWN ARE IN FEET AND ARE REFERENCED TO THE NATIONAL GEODETIC VERTICAL DATUM OF 1929 (NGVD 29).
4. ELEVATIONS ARE BASED ON CONTROL MONUMENTS AS SHOWN IN THE CONTROL TABLE.
5. TOPOGRAPHIC INFORMATION DEPICTED ON THIS SURVEY REPRESENTS THE EXISTING CONDITIONS ON THE DATE OF THE FIELD SURVEY.
6. AERIAL IMAGERY WAS TAKEN IN 2002 AND WAS PROVIDED BY TAYLOR ENGINEERING, INC.
7. AERIAL IMAGERY IS DISPLAYED HEREON FOR INFORMATION PURPOSES ONLY, NO PHOTOGRAPHIC ACCURACY IS IMPLIED BY THIS MAP.
8. NOT VALID WITHOUT THE SIGNATURE AND ORIGINAL RAISED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.
9. UNDERGROUND UTILITIES AND IMPROVEMENTS NOT LOCATED.

LANDWARD LIMITS OF FILL
LOCATION COORDINATES

NAD 83/90 SPCS 0903 NGVD 29 US SURVEY FEET			
POINT	NORTHING	EASTING	ELEVATION
275	508080.17	1358657.26	12.0
276	508051.88	1358856.66	12.0
277	508028.34	1359064.66	12.0
278	507945.55	1359258.72	12.0
279	507901.33	1359453.52	12.0
280	507886.90	1359675.43	12.0
281	507861.71	1359885.04	12.0
282	507845.55	1360099.19	12.0
283	507810.11	1360300.26	12.0
437	507786.32	1360484.46	12.0
436	507760.27	1360689.40	12.0
435	507732.35	1360903.65	12.0
434	507718.45	1361105.20	12.0
433	507687.48	1361304.50	12.0
432	507662.67	1361509.54	12.0
431	507634.81	1361703.06	12.0
430	507598.75	1361933.02	12.0
429	507578.90	1362153.73	12.0
428	507548.87	1362377.08	12.0
427	507533.75	1362579.46	12.0
426	507479.93	1362819.47	12.0
425	507452.38	1363014.55	12.0
424	507435.08	1363238.07	12.0
423	507424.97	1363448.35	12.0
422	507403.42	1363634.50	12.0
421	507375.97	1363806.64	12.0
420	507351.93	1364022.21	12.0
419	507327.02	1364246.92	12.0
418	507315.33	1364436.28	12.0
417	507291.84	1364649.78	12.0
416	507263.98	1364871.49	12.0
415	507263.18	1365077.31	12.0
414	507196.42	1365550.48	12.0
413	507203.47	1365739.16	12.0
412	507197.34	1365953.48	12.0
411	507109.66	1366177.60	12.0
410	507077.81	1366402.19	12.0
409	507039.03	1366606.42	12.0
408	507018.89	1366763.46	12.0
407	506993.16	1366947.02	12.0
406	506965.83	1367151.64	12.0
405	506920.43	1367357.12	12.0
404	506887.81	1367546.43	12.0
403	506857.94	1367744.16	12.0
402	506832.48	1367954.30	12.0
401	506795.91	1368187.73	12.0
400	506775.45	1368377.79	12.0
399	506744.11	1368587.72	12.0
398	506713.79	1368786.02	12.0
397	506689.18	1368990.16	12.0
396	506657.94	1369198.71	12.0
395	506616.72	1369401.77	12.0
394	506598.58	1369594.32	12.0
393	506590.47	1369812.74	12.0
392	506573.90	1370011.11	12.0
391	506554.91	1370220.32	12.0
*600	506508.06	1370249.91	8.0
*601	506498.02	1370421.57	8.0
387	506501.03	1370586.84	12.0
1120	506471.02	1370747.12	8.2
1111	506448.15	1370894.76	7.1
1108	506437.44	1370942.38	7.3
1105	506427.13	1371026.05	6.7
268	506454.63	1371051.30	12.0
267	506410.58	1371260.33	12.0
1076	506384.71	1371300.80	6.2
1078	506375.55	1371364.44	6.8
1080	506392.76	1371386.60	9.6
266	506387.94	1371443.72	12.0
265	506350.38	1371674.14	12.0
264	506317.40	1371866.79	12.0
263	506297.73	1372085.70	12.0
262	506275.01	1372301.11	12.0
261	506243.39	1372503.34	12.0
260	506205.76	1372718.66	12.0
259	506158.18	1372924.84	12.0
258	506127.50	1373128.45	12.0
257	506089.07	1373341.10	12.0
256	506058.36	1373543.84	12.0
255	506024.32	1373763.74	12.0
254	505987.92	1373959.20	12.0
253	505985.39	1374182.62	12.0
252	505945.80	1374394.86	12.0
251	505900.59	1374588.75	12.0
250	505858.77	1374790.63	12.0
249	505831.94	1374984.46	12.0
972	505808.56	1374989.75	8.6
*602	505800.18	1374998.59	8.0
*603	505779.85	1375134.18	8.0
*604	505763.15	1375192.00	8.0
*605	505732.41	1375322.45	8.0
*606	505709.64	1375468.99	8.0
*607	505713.99	1375475.42	8.0
244	505746.63	1375487.47	12.0
243	505721.61	1375601.62	12.0
242	505684.83	1375796.94	12.0
241	505644.66	1375992.70	12.0
240	505608.11	1376191.14	12.0
239	505567.80	1376386.23	12.0
238	505523.36	1376580.53	12.0
237	505489.20	1376783.74	12.0
236	505444.63	1376994.01	12.0
235	505409.56	1377183.14	12.0
233	505370.05	1377381.53	12.0
232	505350.65	1377587.30	12.0

NAD 83/90 SPCS 0903 NGVD 29 US SURVEY FEET			
POINT	NORTHING	EASTING	ELEVATION
231	505314.83	1377799.04	12.0
229	505277.08	1377988.18	12.0
880	505250.08	1378008.37	7.5
974	505235.83	1378095.01	7.0
224	505262.55	1378113.88	12.0
222	505238.33	1378302.60	12.0
221	505206.41	1378294.84	7.1
220	505183.55	1378398.32	6.1
219	505213.19	1378399.02	12.0
218	505194.89	1378547.23	12.0
217	505154.63	1378748.94	12.0
216	505111.66	1378947.21	12.0
215	505073.50	1379151.88	12.0
214	505041.59	1379349.08	12.0
213	505002.00	1379542.37	12.0
212	504966.52	1379736.13	12.0
211	504929.31	1379945.79	12.0
210	504903.79	1380131.54	12.0
816	504863.25	1380214.31	9.6
815	504846.59	1380215.39	6.6
814	504835.03	1380223.98	5.7
813	504828.95	1380239.90	5.4
785	504817.84	1380411.18	6.5
771	504829.34	1380423.54	7.6
*608	504796.90	1380551.79	8.0
*609	504776.11	1380550.99	8.0
*610	504772.08	1380586.84	8.0
*611	504799.74	1380591.95	8.0
752	504804.30	1380688.69	12.0
209	504795.01	1380726.34	12.0
199	504761.50	1380933.30	12.0
200	504721.75	1381127.21	12.0
201	504698.32	1381328.97	12.0
202	504647.67	1381521.71	12.0
203	504622.85	1381704.89	12.0
204	504571.31	1381915.61	12.0
205	504543.86	1382114.47	12.0
206	504515.41	1382312.35	12.0
198	504485.03	1382509.36	12.0
197	504445.97	1382717.04	12.0
196	504407.33	1382909.58	12.0
195	504359.57	1383110.69	12.0
194	504310.78	1383314.38	12.0
193	504271.32	1383496.75	12.0
192	504222.47	1383704.80	12.0
191	504202.35	1383905.18	12.0
190	504151.32	1384116.81	12.0
189	504117.46	1384314.61	12.0
164	504100.25	1384521.36	12.0
165	504038.36	1384711.47	12.0
166	503990.24	1384908.85	12.0
167	503950.57	1385102.05	12.0
168	503921.72	1385300.50	12.0
169	503883.97	1385496.85	12.0
170	503852.92	1385694.62	12.0
171	503788.34	1385884.35	12.0
172	503733.32	1386076.66	12.0
173	503683.09	1386271.34	12.0
174	503680.06	1386471.39	12.0
175	503655.17	1386657.11	12.0
176	503592.57	1386848.82	12.0
178	503557.48	1387064.02	12.0
179	503533.92	1387182.15	12.0
181	503519.50	1387305.81	7.6
184	503474.50	1387633.26	12.0
185	503407.98	1387850.03	12.0
186	503404.08	1388055.67	12.0
187	503317.35	1388239.26	12.0
188	503281.31	1388415.77	12.0
163	503232.38	1388630.98	12.0
162	503197.79	1388818.67	12.0
161	503158.58	1389051.44	12.0
160	503100.42	1389242.95	12.0
159	503051.27	1389436.87	12.0
158	503007.42	1389638.08	12.0
157	502973.68	1389829.58	12.0
155	502967.85	1390029.96	12.0
154	502940.68	1390228.16	12.0
153	502903.34	1390425.13	12.0
152	502884.77	1390610.45	12.0
151	502769.54	1390802.48	12.0
150	502727.09	1390998.01	12.0
149	502706.29	1391198.06	12.0
148	502661.58	1391393.72	12.0
145	502618.51	1391585.00	12.0
144	502560.53	1391776.62	12.0
143	502515.06	1391971.58	12.0
142	502511.06	1392172.37	12.0
141	502457.93	1392366.13	12.0
140	502398.82	1392559.27	12.0
139	502390.58	1392756.37	12.0
138	502314.34	1392941.68	12.0
137	502271.57	1393137.66	12.0
136	502221.97	1393332.13	12.0
135	502160.39	1393522.54	12.0
134	502106.57	1393715.76	12.0
133	502060.30	1393910.95	12.0
132	502011.78	1394105.78	12.0
131	501974.22	1394302.90	12.0
130	501971.06	1394502.98	12.0
129	501958.83	1394702.66	12.0
128	501867.52	1394906.67	12.0
127	501810.91	1395098.92	12.0
126	501787.42	1395297.99	12.0
125	501741.21	1395492.60	12.0

* POINT INTERPOLATED ON 8 FOOT CONTOUR LINE

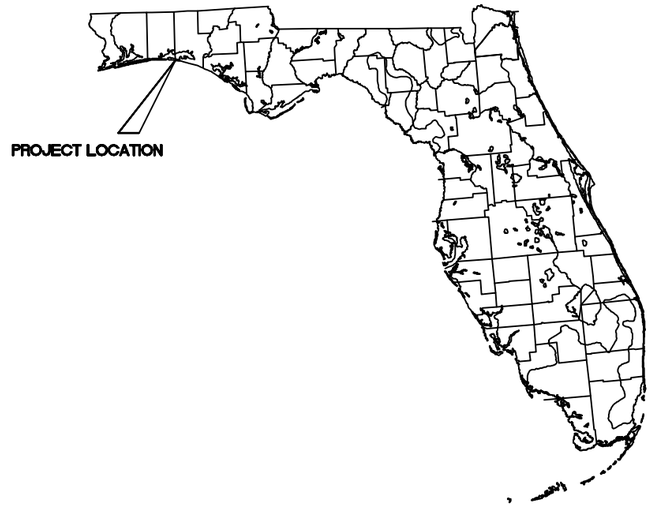

CONTROL TABLE

NAD 83/90 SPCS 0903 NGVD 29 US SURVEY FEET				
NORTHING	EASTING	ELEVATION	AGENCY	STAMPING
506609.70	1370434.37	21.03	DNR	60 76 A03
503818.96	1386956.58	10.26	DNR	60 94 DA03
504861.70	1381189.90	33.59	DNR	60 76 A05
508261.52	1358716.04	20.02	DNR	R-39 DK 95
507380.82	1360801.83	19.49	DNR	R-41 DKLU 1973
507584.39	1362230.97	12.48	M&E	R-42.5 2002
507388.88	1365668.71	21.92	DNR	R-44 DK 95
507218.29	1365318.83	11.73	M&E	R-45.5 2002
507150.72	1366817.27	13.94	DNR	R-47 DK 95
506749.25	1368815.23	17.98	M&E	R-49 2002
506235.36	1373457.48	21.43	M&E	R-3A 2002'
505639.98	1376456.58	24.73	DNR	R-6 RESET 1980'
504859.50	1382507.74	27.91	DNR	R-11 WLTN 1973'
504050.60	1385526.36	14.48	DNR	R 14 WL 95'
503256.87	1388808.26	13.10	DNR	WALTON R-17 RESET 1980'
502689.44	1391606.89	13.18	DNR	R 20 WL 94'
502253.93	1394730.38	11.06	DNR	R-23 WL 95'

LEGEND

OBSERVED BUILDING LINE
OBSERVED LANDWARD LIMITS OF FILL
EROSION CONTROL LINE

MORGAN & EKLUND, INC.
PROFESSIONAL SURVEY CONSULTANTS
8745 US HIGHWAY #1
WABASSO, FL 32970
PHONE: (772) 388-5364
FAX: (772) 388-3165
1500 S.E. 3RD COURT
SUITE 203
DEERFIELD BEACH, FL 33441
PHONE: (954) 421-6882
FAX: (954) 421-0451

I, JOHN R. MORGAN II, LICENSED TO ENGAGE IN THE PRACTICE OF LAND SURVEYING UNDER THE LAWS OF THE STATE OF FLORIDA, COMMISSIONED BY BREVARD COUNTY TO PERFORM THE SURVEY DEPICTED HEREON, DO HEREBY CERTIFY THAT THIS SURVEY COMPLIES WITH AND MEETS THE MINIMUM TECHNICAL STANDARDS FOR LAND SURVEYING, AS SET FORTH BY THE FLORIDA BOARD OF PROFESSIONAL SURVEYORS AND MAPPERS, IN ACCORDANCE WITH CHAPTER 61G17-6, F.A.C. AND CHAPTER 472.04 F.S. I FURTHER CERTIFY THAT THIS SURVEY CONFORMS WITH APPROPRIATE PRINCIPLES SET FORTH PURSUANT TO CHAPTER 161.141-161.211 F.S. AND THAT THE MEAN HIGH WATER LINE SURVEY DEPICTED HEREON CONFORMS WITH CHAPTER 177, PART II, FLORIDA STATUTES AND IS RECORDED IN THE PUBLIC RECORDS IN THE PUBLIC REPOSITORY OF THE FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION, BUREAU OF SURVEY AND MAPPING AS MEAN HIGH WATER SURVEY FILE # 3348

JOHN R. MORGAN II, PSM
FLORIDA REGISTERED SURVEYOR
AND MAPPER CERT. NO. 3520 DATE: _____

DRAWN BY: CAG	COMMISSION NO.: 5374.02
CHECKED BY: JRM	SCALE: N/A
DATE OF SURVEY: 09/07/03	DATE: 11/20/03
FIELD BOOK: WAL 10	SHEET 1 OF 13
PAGE NO.: 35-74	